

NOTE:

1.MATERIAL:

1.1 INSULATOR:LCP UL 94V-0,BLACK

1.2 CONTACT:C5191;30u" MIN NICKEL UNDERPALTED OVERALL
80u"MIN Tin PLATED ON SOLDER AREA
G/F PALTED ON CONTACT AREA

1.3 SHELL:C2680,50u" Ni PALTED OVERALL

2.ELECTRICAL CHARACTERISTICS:

2.1 CONTACTRESISTANCE:100mΩ MAX.

2.2 CONTACT CURRENT RATING:0.5A


2.3 DIELECTRIC WITHSTANDING VOLTAGE:500 V R.M.S.

2.4 INSULATION RESISTANCE 1000 MΩ MIN.

2.5 OPERATING TEMPERATURE:-40℃ ~ 85℃

Pin No.	NAME
1	DAT2
2	CD/DAT3
3	CMD
4	VDD
5	CLK
6	VSS
7	DAT0
8	DAT1


WITHOUT CARD	CARD INSERTEN
WP* CD*	WP* CD*

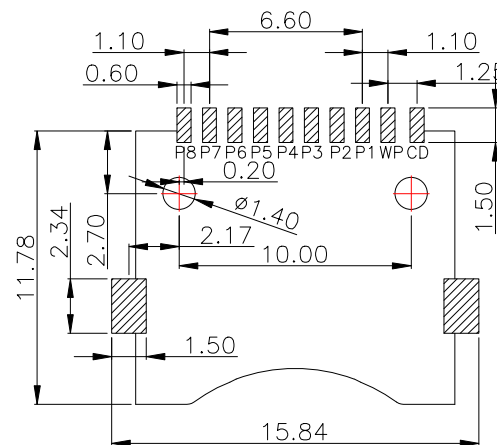

Recommended P.C.B Layout(Top Side)


MANUFACTURE DWG		东莞市讯普电子科技有限公司 DongGuan XunPu Electronics Co.,Ltd	
UNLESS OTHERWISE SPECIFIED TOLERANCES		TITLE: T-F 简易卡座无卷边	
DECIMALS:	ANGLES:	PAR	TF-124-ACP10
.X:±0.38	.X':±2°	DWN	
.XX:±0.25	.X':±1°	CHKD	
.XXX:±0.15	.XX':±0.5°	APVD	
CUSTOMER COPY		SCALE1:1	UNIT:MM
		SIZE:A4	SHEET:1F1
			REV:A

User Direction of Unreeling

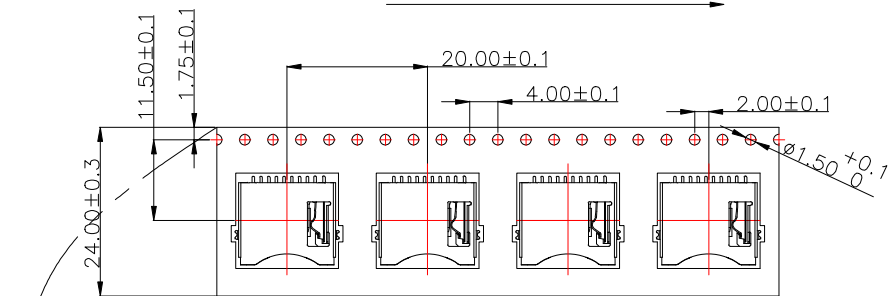

NOTES

1. NUMBER OF CONNECTORS: 1000PCS/REEL
2. LEAD TAPE LENGTH

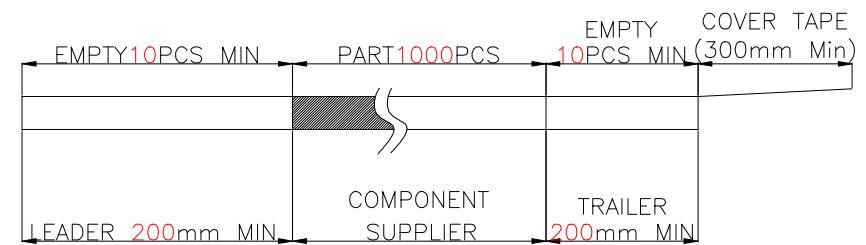


3. QUANTITY: 10000PCS/CARTON



COVER TAPE PEELING ANGLE: $165^{\circ} \sim 180^{\circ}$
PEELING FORCE: 20~130g

CARRIER TAPE



User Direction of Unreeling

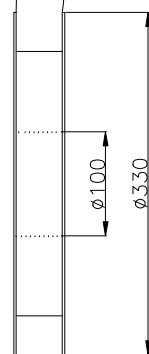

DETAIL B

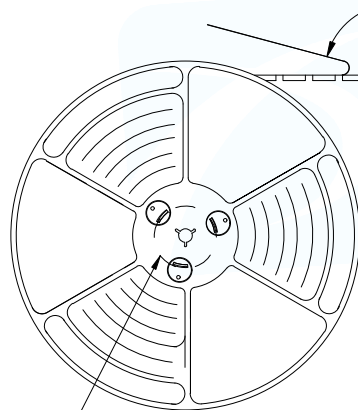

DETAIL B

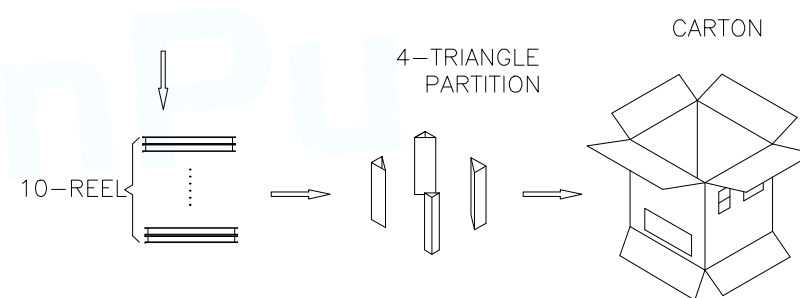

MANUFACTURE DWG		 东莞市讯普电子科技有限公司 DongGuan XunPu Electronics Co.,Ltd	
UNLESS OTHERWISE SPECIFIED TOLERANCES			TITLE: T-F 简易卡座无卷边
			PAR TF-124-ACP10
DECIMALS:	ANGLES:		DWN
.X: ± 0.38	X': $\pm 2^{\circ}$		CHKD
.XX: ± 0.25	.X': $\pm 1^{\circ}$		APVD
.XXX: ± 0.15	.XX': $\pm 0.5^{\circ}$		SCALE 1:1
CUSTOMER COPY		UNIT: MM	
		SIZE: A4	
		SHEET: 1F1	
		REV: A	