
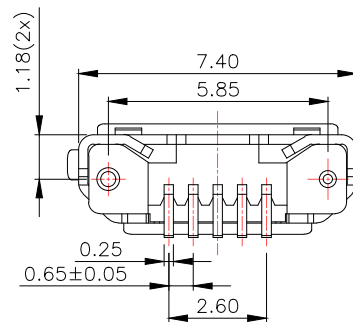
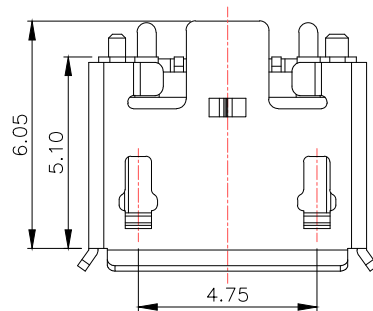
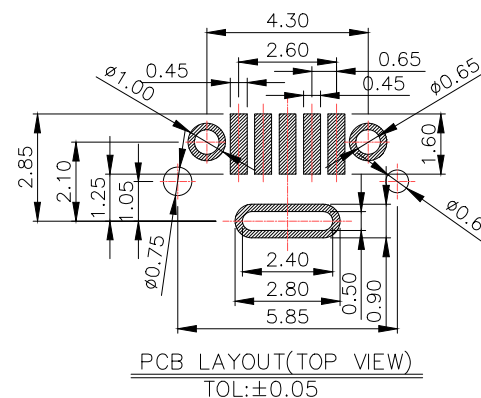
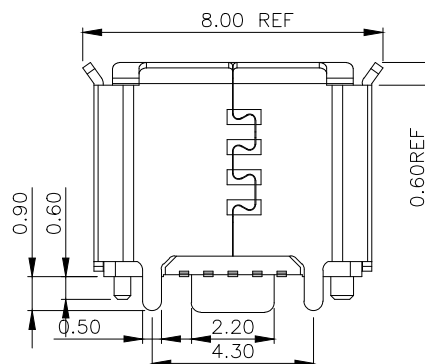
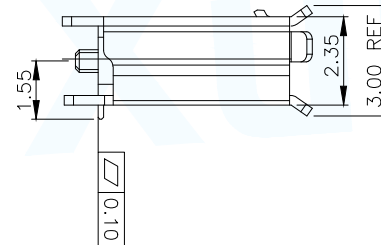


加CAP示意图(SCAL 2:1)

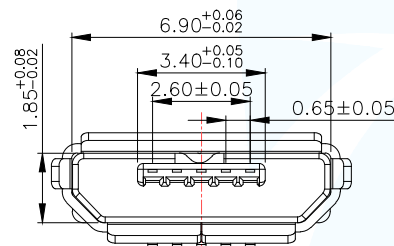

备注:

1.产品规格:

- 1-1.插入力:35N MAX.
- 1-2.拔出力:10N MIN.INITIAL 8N MIN AFTER TESTED
- 1-3.额定电流:1.0A
- 1-4.额定电压:30V
- 1-5.耐久性:10000 CYCLES MIN.
- 1-6.耐电压:100V AC MIN.
- 1-7.接触阻抗:30m Ω MAX.INITIAL;40m Ω MAX AFTER TESTED
- 1-8.绝缘电阻:100M Ω MIN
- 1-9.工作温度:-30°TO +80°

2.材质:

- 2.1胶芯: LCP-BLACK,UL94V-0
- 2.2端子: C5191,镍底, 镀金1 μ "
- 2.3外壳: SUS304, 表面镀零锡/镀镍

MANUFACTURE DWG		 东莞市讯普电子科技有限公司 DongGuan XunPu Electronics Co.,Ltd		
UNLESS OTHERWISE SPECIFIED TOLERANCES			TITLE:MICRO USB 5PIN 立式贴片 无边带柱	
			PAR	MU-110-ACY
			DWN	YAO 2016.11.16
			CHKD	
			APVD	
DECIMALS:	ANGLES:		SCALE 1:1	UNIT:MM
X.X:±0.3	X°.:±2°		CUSTOMER COPY	
X.XX:±0.25	X.X°:±0.5°			
X.XXX:±0.15				
			SIZE:A4	SHEET:1F1 REV:A