


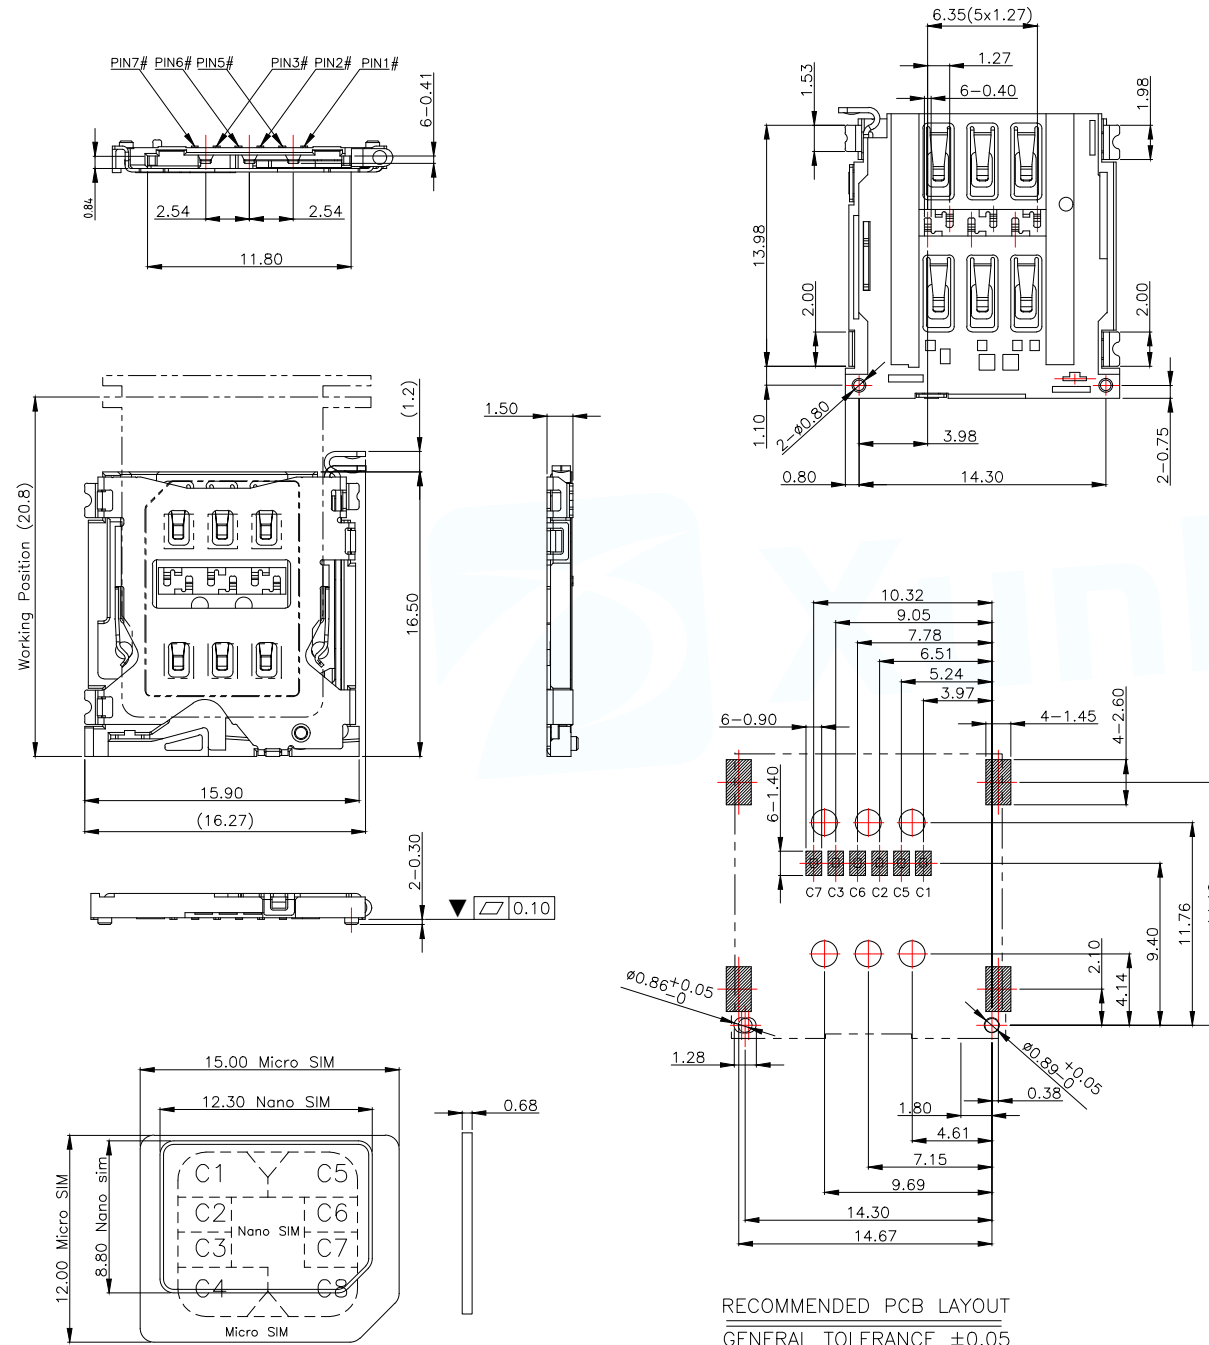

NOTES:

- ELECTRICAL CHARACTERISTICS:
 - CURRENT RATING: 1 Amp/PIN. MAX.
 - VOLTAGE: 30V DC. MAX.
 - LOW LEVEL CONTACT RESISTANCE: 30 mOhms MAX. INITIALLY.
 - DIELECTRIC WITHSTANDING VOLTAGE: 500V AC MIN. FOR 1 MINUTE.
 - INSULATION RESISTANCE: 100MOhms MIN.(DC 500V FOR 1 MINUTE)
- MECHANICAL CHARACTERISTICS:
 - DURABILITY: 1500 CYCLES.
 - OPERATING FORCE (INSERTING & WITHDRAWAL): 1N-10N.
- ENVIRONMENTAL CHARACTERISTICS:
 - OPERATING TEMP. RANGE: -25°C TO 85°C . [INCLUDING TERMINAL TEMP. RISE]
 - STORAGE TEMP.: -40°C TO 85°C .
- QUANTITY OF PRODUCTS: 1000PCS/REEL.
- PLEASE CONTACT GOSTAR SALES REPRESENTATIVE TO VERIFY PRODUCT DETAILS.

PIN 1#	VCC
PIN 2#	RST
PIN 3#	CLK
PIN 5#	GND
PIN 6#	VPP
PIN 7#	I/O

5	LEVER	1	SUS,
4	CAM	1	SUS,
3	SHELL	1	SUS, GOLD PLATING
2	HOUSING	1	LCP,BLACK
1	CONTACT	1	BRONZE ALLOY, GOLD PLATING
ITEM	PART NAME	Q'TY	DESCRIPTION

MANUFACTURE DWG

东莞市讯普电子科技有限公司
DongGuan XunPu Electronics Co.,LtdUNLESS OTHERWISE
SPECIFIED TOLERANCESTITLE:NANO SIM CARD 6PIN 1.5H
CONN. WITH LEVER (NO DITECT)



DECIMALS:

ANGLES:

X.: ± 0.50 X': $\pm 2^{\circ}$ X.X: ± 0.20 X.X': $\pm 1^{\circ}$ X.XX: ± 0.10


CUSTOMER COPY

PAR	SMN-327-ACP6
DWN	
CHKD	
APVD	
SCALE:1:1	UNIT:MM
SIZE:A4	SHEET:1F1
REV:A	

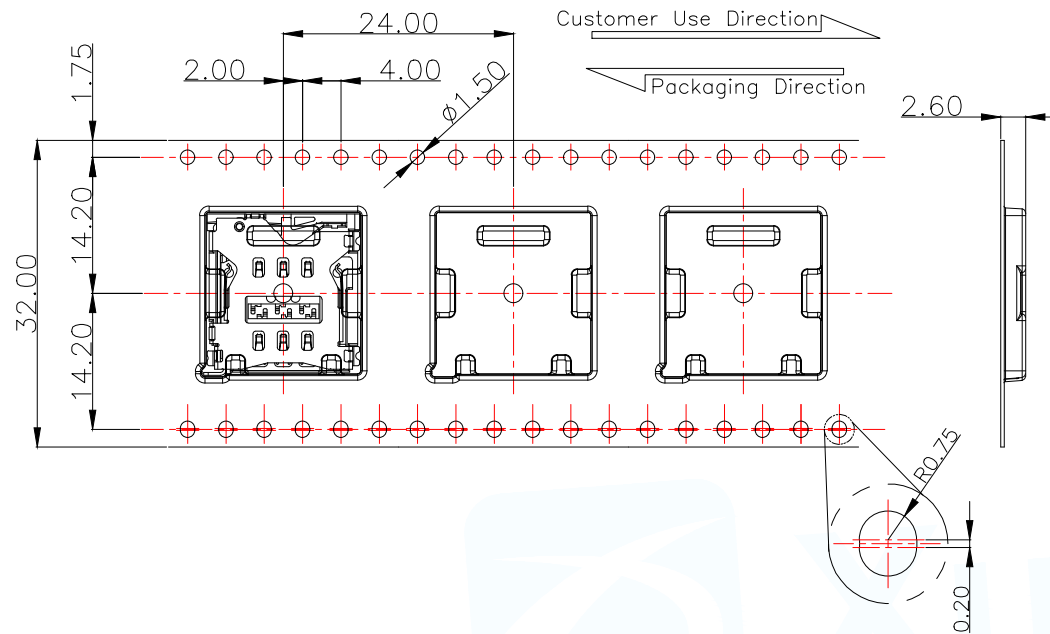


Reel with Product
10 Reel

Reel Label

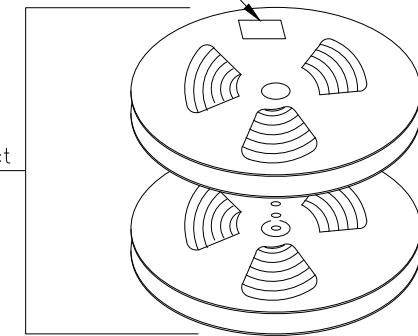


Sealing Tape

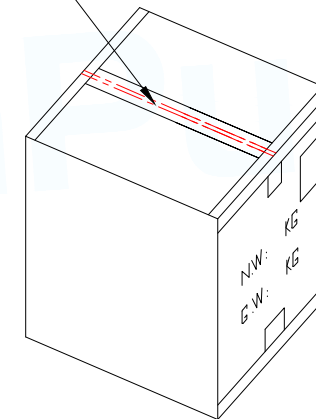


Desiccant

Waterproof Bag

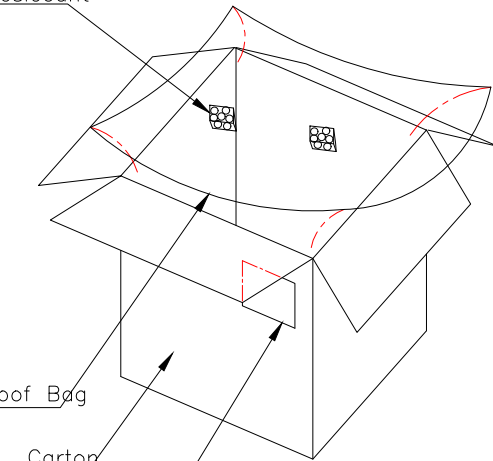

Carton

Carton Label

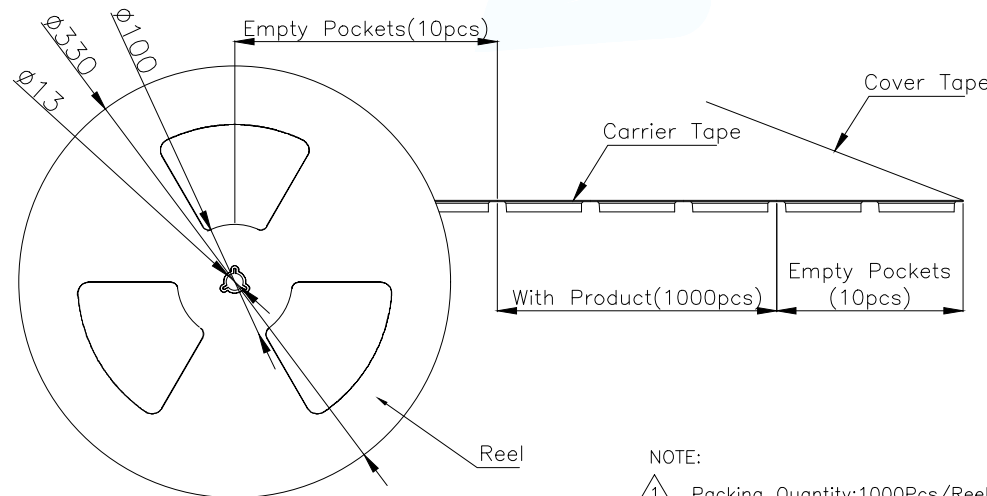

NOTE:

1. Packing Quantity: 1000Pcs/Reel, 10Kpcs/Carton;
2. When Carton Fill Zero, Then Fill of Polyethylene Foam;

MANUFACTURE DWG		 东莞市讯普电子科技有限公司 DongGuan XunPu Electronics Co., Ltd	
UNLESS OTHERWISE SPECIFIED TOLERANCES			TITLE: NANO SIM CARD 6PIN 1.5H CONN. WITH LEVER (NO DITECT)
DECIMALS:	ANGLES:		PAR SMN-327-ACP6
X.: ±0.50	X': ±2°		DWN
X.X: ±0.20	X.X': ±1°		CHKD
X.XX: ±0.10		CUSTOMER COPY	SCALE: 1:1 UNIT: MM
		SIZE: A4	SHEET: 1F1
			REV: A