
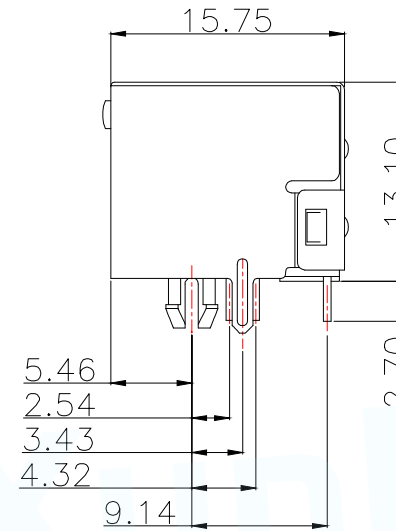


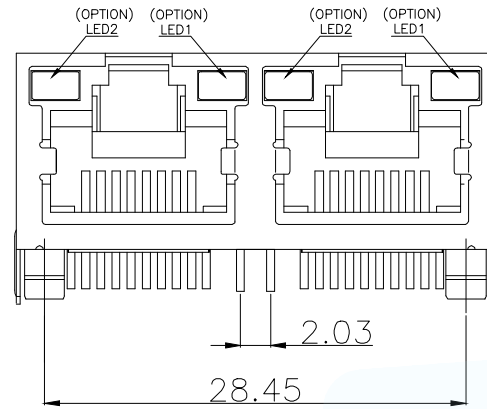

NOTES

MATERIAL

1. HOUSING MATERIAL : THERMO PLASTICS UL94V-0.
2. CONTACT MATERIAL : PHOSPHOR BRONZE $\phi 0.46\text{mm}$.
3. PLATING : GOLD FLASH PLATING OVER NICKEL.
4. SHIELD : 0.20mm THICKNESS COPPER ALLOY WITH NICKEL PLATED.

ELECTRICAL



1. VOLTAGE RATING : 125 VAC RMS.
2. CURRENT RATING : 1.5 AMP.
3. CONTACT RESISTANCE : 40 MILLIOHMS MAX.
4. INSULATION RESISTANCE : 500 MEGOHMS MIN @ 100V DC.
5. DIELECTRIC RESISTANCE : 500V DC RMS 50Hz. 1MIN.

MECHANICAL

1. DURRABILITY : 750 CYCLES MIN.
2. MATING/UNMATING FORC: 2.24 KG.F MAX.

ENVIRONMENTAL:

1. OPERATION : $-40^{\circ}\text{C} \sim +85^{\circ}\text{C}$.
2. STORAGE : $-40^{\circ}\text{C} \sim +85^{\circ}\text{C}$.

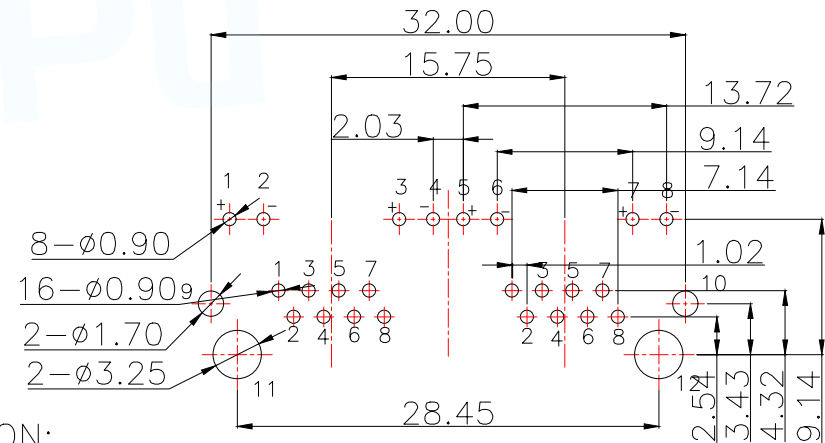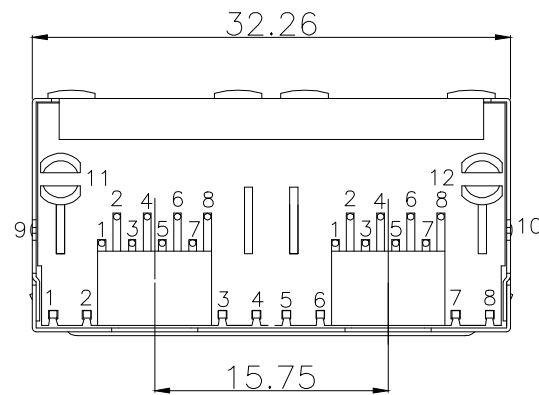

PART NUMBER DESCRIPTION:

RJ45-505-010-XX

流水码

35:无弹左黄右绿GF PA46黑盘装

36:无弹左绿右黄GF PA46黑盘装

PCBLAYOUT T=1.2

TOL:±0.05

MANUFACTURE DWG		 东莞市讯普电子科技有限公司 DongGuan XunPu Electronics Co.,Ltd	
UNLESS OTHERWISE SPECIFIED TOLERANCES			
DECIMALS:	ANGLES:	TITLE:	RJ45 1x2 无弹灯DIP PA46黑
.X:±0.35	X°.:±3'	PAR	RJ45-505-101-35
.XX:±0.25	.X°.:±2'	DWN	
.XXX:±0.15	.XX°.:±1'	CHKD	
		APVD	
		SCALE 1:1	UNIT:MM
		SIZE:A4	SHEET:1F1
		CUSTOMER COPY	REV:A