
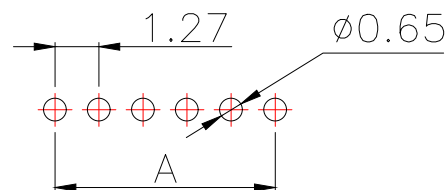
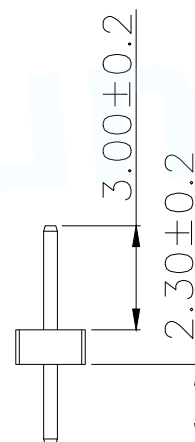


SPECIFICATIONS

Current Rating: 1.0 Amps
Withstanding Voltage: AC 500V
Insulation Resistance: 1000MΩ Min
Contact Resistance: 20mΩ Max
Operation Temperature: -40°to+105°
Insulator Material: Polyester(UL94V-0)
Contact Material: Brass
Standard: PA6T
Contact Plating: Gold Flash
Max.Processing Temp: 240°C for30-60seconds
(260°C for5seconds)

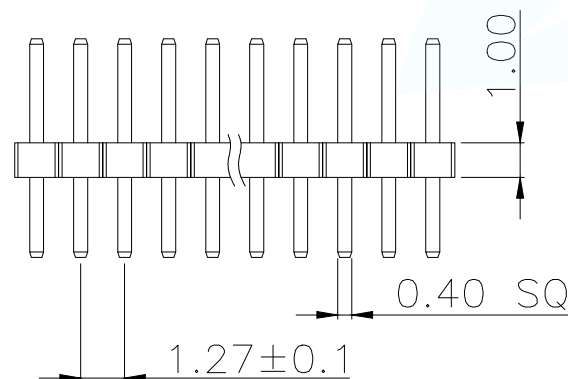

RECOMMEND P.C.B LAYOUT
PCB TOLERANCE:±0.05 (TOP VIEW)

P/N	PIN	DIM.A	DIM.B
PH1.27-01-01PZD-PA030	1	0.00	1.27
PH1.27-01-02PZD-PA030	2	1.27	2.54
PH1.27-01-03PZD-PA030	3	2.54	3.81
PH1.27-01-04PZD-PA030	4	3.81	5.08
PH1.27-01-05PZD-PA030	5	5.08	6.35
PH1.27-01-06PZD-PA030	6	6.35	7.62
PH1.27-01-07PZD-PA030	7	7.62	8.89
PH1.27-01-08PZD-PA030	8	8.89	10.16
PH1.27-01-09PZD-PA030	9	10.16	11.43
.....			
PH1.27-01-50PZD-PA030	50	(PIN-1)x1.27	(PIN)x1.27

PART NUMBER DESCRIPTION:

PH1.27-01-NPZD

↑ (D=单排;S=双排)
↑ (Z=直脚;W=弯脚)
↑ (PIN数量;01.....50PIN)
↑ (排针开关)

MANUFACTURE DWG		 东莞市讯普电子科技有限公司 DongGuan XunPu Electronics Co.,Ltd	
UNLESS OTHERWISE SPECIFIED TOLERANCES			TITLE:1.27PH H1.0 1xnPin 180度 W2.0 PC2.3 PA3.0 PB1.0 L7.2 6T 0.4针
			PAR PH1.27-01-NPZD-PA030
DECIMALS:	ANGLES:		DWN
X.±0.30	X°±5'		CHKD
X.X±0.20	X.X'±1"		APVD
X.XX±0.10	X.XX'±0.5'		SCALE N:A UNIT:MM
CUSTOMER COPY		SIZE:A4	SHEET:1F1
			REV:A